



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
PBCC-3 230V 1N 50/60hz

19078508

30/03/2021

DENOMINATION:


Undercounter hot plate 3 GN 1/1 capacity PBCC-3 230V 1N 50/60 Hz

DESCRIPTION :

- "- Hot plate specially designed to be mounted under a countertop, keeping pre-heated products at optimum temperatures during service time.
- Factory-approved countertop materials include granite and quartz (Silestone®) up to 20 mm. Please contact factory for applications with other materials.
- Top plate aluminum surface for a better diffusion of the hot on the worktop thanks to its high thermal conductivity.
- Total seamless countertop, maximizing hygiene, tightness and aesthetics.
- Expansion joint installation needed between countertop hot and neutral areas.
- Heating system by hidden silicon resistors attached to the top of the plate. Silicon resistors allow achieving the working temperature very fast and uniformly across the surface.
- Control pannel with 1-meter long cable.
- Electronic thermostat, with digital display, to control and regulate the temperature on the worktop at the desired set point.
- Operating temperature under worktop: from +80 °C to +100 °C."

DIMENSIONS

X Width	936 mm	X Gross width	1130 mm
Y Depth	590 mm	Y Gross depth	820 mm
Z Height	147 mm	Z Gross height	430 mm
Net Weight	17,0 kg	Gross Weight	22,0 kg
Net volume	0,092 m3	Gross volume	0,398 m3




ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	1,355 kW
Amperage (A)	5,91A
Voltage	230V - 1N
Electric frequency	50/60Hz

TECHNICAL FEATURES

Capacity (GN)	3 x GN1/1
Ramekin Ø 130mm cap. on top	38
Plate Ø 150mm capacity on top	29
Plate Ø250 mm capacity on top	10

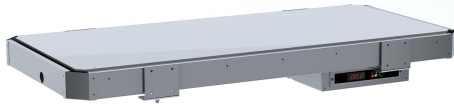




Catalogue
FOOD SERVICE

Capítulo
DISTRIBUTION

Modelo
PBCC-3 230V 1N 50/60hz

19078508

30/03/2021

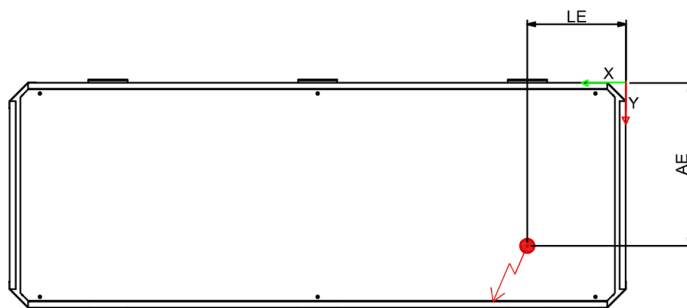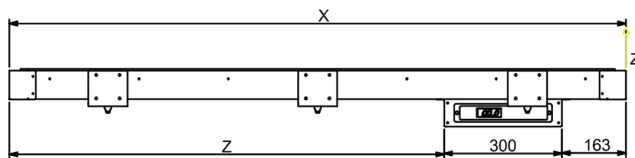

LE : 287 mm

AE : 296 mm

H : - 112 mm

	X	Z
2GN	611	133
3GN	936	458
4GN	1261	783
5GN	1586	1108
6GN	1911	1433