



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
CBMA16-3 230V 1N 50/60Hz

19081533

01/03/2021

DENOMINATION:


Wet bain-marie well sauces width 256 mm 3 GN 1/6 capacity manual filling with tap CBMA16-3 230V 1N 50/60 Hz

DESCRIPTION :

- Wet bain-marie well specially designed to hold, display and serve warm sauces at show-cooking stations.
- Manufactured in stainless steel with satin finish.
- Wet bain-marie well to display pans with different heights. Drainage area slightly bent.
- Suitable for GN 1/1 pans with a maximum depth of 100 mm.
- Well with rounded corners inside to make cleaning operations easier, ensuring maximum hygiene.
- Bain-marie indirect water heating system with hidden silicon resistors attached to the bottom of the well. Silicon resistors allow achieving the working temperature fast and uniformly across the surface. Wet bain-marie system guarantees the best uniformity in heat distribution over the surface of the GN pans.
- Control pannel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control pannel with 1-meter long cable, allowing to be installed on another element, e.g, furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature in the wet bain-marie well at the desired set point.
- Minimum internal diameter of 32 mm for drain installation.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Operating temperature in wet bain-marie well: from +30 °C to +70 °C."
- Built-in water inlet with 1/2" ball valve with flat tap to fill the well.

DIMENSIONS

X Width	584 mm	X Gross width	550 mm
Y Depth	256 mm	Y Gross depth	735 mm
Z Height	252 mm	Z Gross height	430 mm
Net Weight	10,0 kg	Gross Weight	12,0 kg
Net volume	0,038 m3	Gross volume	0,174 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,810 kW
Amperage (A)	3,55A
Voltage	230V - 1N
Electric frequency	50/60Hz

TECHNICAL FEATURES

Cut-out Length (mm)	551
Cut-out Width (mm)	227
Capacity (GN)	3 x GN1/6
Depth well (mm)	145
Cap. well (L) (GN 1/6-65 mm)	2 mm
Cap. well (L) (GN 1/6-100 mm)	1 mm






Catalogue
FOOD SERVICE

Capítulo
DISTRIBUTION

Modelo
CBMA16-3 230V 1N 50/60Hz

19081533

01/03/2021

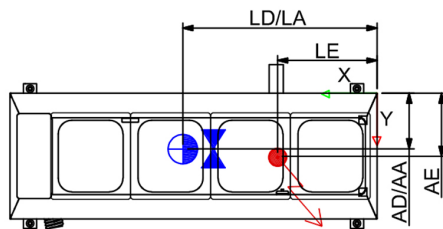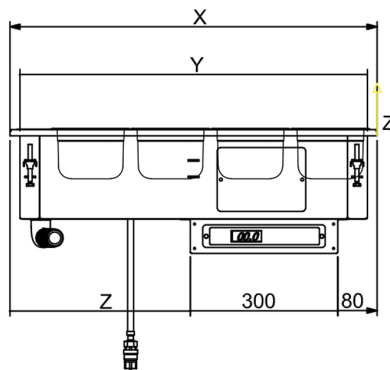

H  : - 208 mm
H  : - 208 mm
H  : - 205 mm

LE : 205 mm

AD : 113 mm

AA: 83 mm

AE : 11 mm

	X	Y	Z	LA/LD
16-3	576	551	196	522
16-4	738	713	358	685