



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
CBMA16-4 230V 1N 50/60Hz

19081534

01/03/2021

DENOMINATION:


Wet bain marie well sauces width 256 mm 4 GN 1/6 capacity manual filling with tap CBMA16-4 230V 1N 50/60 Hz

DESCRIPTION :

- Dry bain-marie well specially designed to hold, display and serve warm sauces at show-cooking stations.
- Manufactured in stainless steel with satin finish.
- Dry heat bain-marie well to display pans with different heights.
- Suitable for GN 1/6 pans with a maximum depth of 100 mm.
- Well with rounded corners inside to make cleaning operations easier, ensuring maximum hygiene.
- Heating system generated by a set of resistor modules that create hot air inside the well. Unlike water bain-marie, dry bain-marie does not generate much vapor, reducing the condensation on the foodshield glasses thus improving product display.
- Control pannel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control pannel with 1-meter long cable, allowing to be installed on another element, e.g, furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature in the dry bain-marie well at the desired set point.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Operating temperature in dry bain-marie well for sauces: from +30 °C to +70 °C."
- Built-in water inlet with 1/2" ball valve with flat tap to fill the well.

DIMENSIONS

X Width	746 mm	X Gross width	805 mm
Y Depth	256 mm	Y Gross depth	735 mm
Z Height	252 mm	Z Gross height	430 mm
Net Weight	12,0 kg	Gross Weight	14,0 kg
Net volume	0,048 m3	Gross volume	0,254 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,810 kW
Amperage (A)	3,55A
Voltage	230V - 1N
Electric frequency	50/60Hz

TECHNICAL FEATURES

Cut-out Lenght (mm)	713
Cut-out Width (mm)	227
Capacity (GN)	4 x GN1/6
Depth well (mm)	145
Cap. well (L) (GN 1/6-65 mm)	2 mm
Cap. well (L) (GN 1/6-100 mm)	1 mm






Catalogue
FOOD SERVICE

Capítulo
DISTRIBUTION

Modelo
CBMA16-4 230V 1N 50/60Hz

19081534

01/03/2021

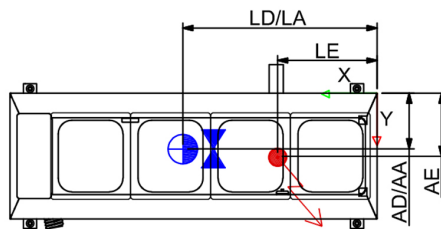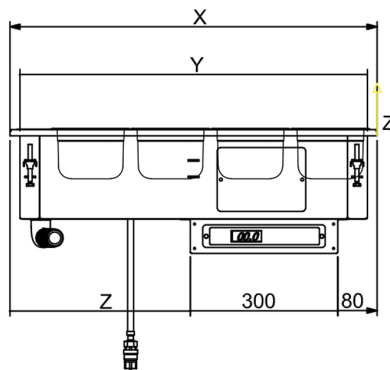

H  : - 208 mm
H  : - 208 mm
H  : - 205 mm

LE : 205 mm

AD : 113 mm

AA: 83 mm

AE : 11 mm

	X	Y	Z	LA/LD
16-3	576	551	196	522
16-4	738	713	358	685