Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G/C 230V 1N 50Hz

19089539 23/03/2022

DENOMINATION:

Refrigerated central counter - Advance 700 Gastronorm with 6 doors (3+3).

DESCRIPTION :

- Structure built with AISI-304 stainless steel
- 50 mm, 40 kg/m3 injected polyurethane insulation.
- Forced draught cooling system inside the room.
- Copper piping and aluminium flaps evaporator.
- Digital display for electronic and digital control of temperature and defrosting.
- The controls are integrated in the front panel for a better protection against dirt. IPX5 compliant, the controls are protected against water splash and jets.
- Easier loading and unloading thanks to its door self-closing and stay open features.
- Removable and height adjustable plastic covered steel shelves for easy cleaning (GN1/1 size).
- Equipment per door: 1 GN 1/1 grid and 2 sets of height adjustable tray slides.
- Built-in drainage to get rid of waste liquids inside the unit.
- Interior LED lighting (only for models with glass doors).
- Embedded bottom and curved panels inside for easy cleaning and maintenance.
- Height adjustable stainless steel legs.
- 10 cm high splashback.
- Working temperature: from 0 ºC to +8 ºC (refrigerators) and from -18 ºC to -22 ºC (freezers).

-Tested in climatic class IV.
Refrigerated central counters.
FLEXIBILITY: Doors on both sides for easier reaching in.

POSSIBLE OPTIONS :

- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Granite worktop
- Locks
- Left group
- Without Countertop
- Panoramic aperture
- Remote group

STANDARD OPTIONS :

- HACCP alarm
- Without breastplate

POSSIBLE ACCESSORIES :

- REFRIGERATION
- ACCESSORIES
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 12035781 GN 1/1 grid in epoxy (530x325) 3

DIMENSIONS



X Width	1790 mm	X Gross width	1910 mm
Y Depth	768 mm	Y Gross depth	825 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	132,0 kg	Gross Weight	139,0 kg
Net volume	1,175 m3	Gross volume	1,576 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	0,93 A
Electric frequency	50Hz
Electric power	0,174 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Climate class	4
Cooling gas load	98,000 g
Gross internal volume	403 L
Refrigeration power	0,361 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Condensation system	Vent.
Number of doors	6

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-3G/C 230V 1N 50Hz

19089539 23/03/2022

- 12036880 Advance table grill guide - wall and central - 519 mm - 1 piece 12

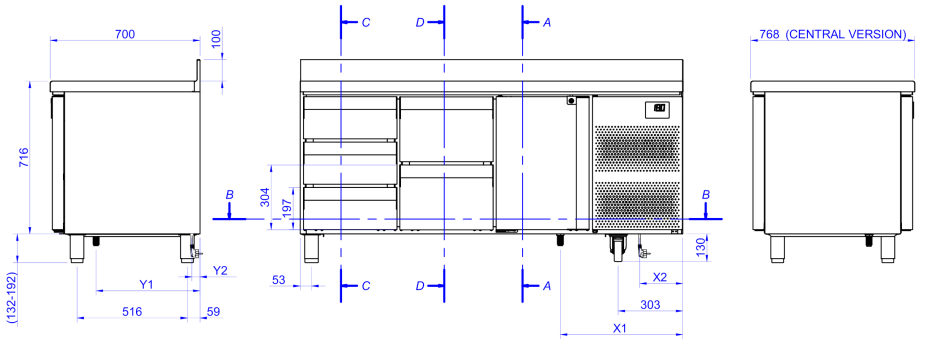

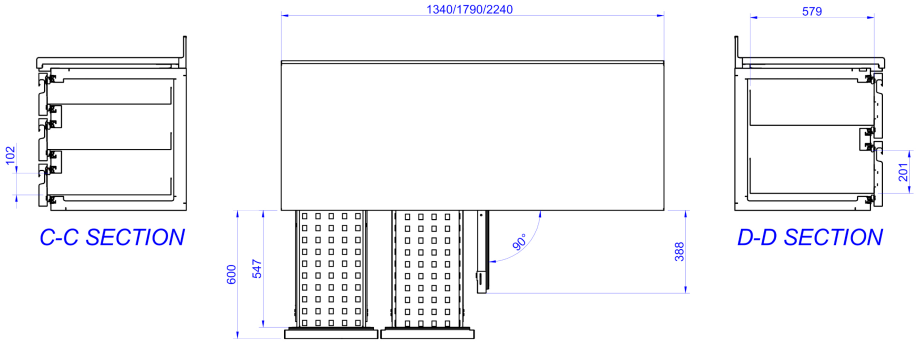

C-C SECTION

D-D SECTION

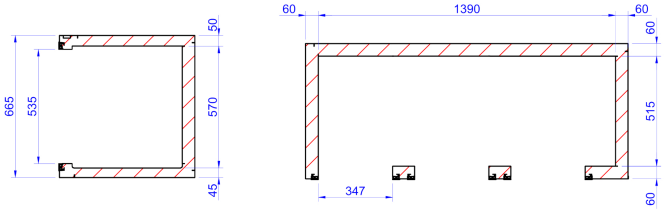

DRAIN	X1 (mm)	573
	Y1 (mm)	486
ELECT.	X2 (mm)	202
	Y2 (mm)	38

A-A SECTION

B-B SECTION