

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ST-139P 230V 1N 50Hz

19089745

25/03/2022

DENOMINATION:

Snack showcase with flat cover glass.

DESCRIPTION :

- Inner tray made of high quality austenitic stainless steel.
- External cladding with anodised aluminium profile and PVC with glass on the sides.
- Injected polyurethane insulation of 40 kg/m3 density without CFC.
- Capacity to receive 40 mm GN-1/3 trays.
- The versions with remote unit include the refrigeration unit as standard equipment.
- * Its dimensions are 310 x 360 x 240 mm and it must be connected at a maximum distance of 1.5 m.
- Copper tube cold plate evaporator.
- Emergency drain for waste water evacuation.
- Electronic thermostat for temperature control.
- Protected interior lighting.
- Illuminated main switch.
- Working temperature: +4 °C, +8 °C, (ambient 32 °C).
- Curved flat cover (two pieces) and glass sliding doors.

POSSIBLE OPTIONS :


- British plug

POSSIBLE ACCESSORIES :

- DISTRIBUTION

DIMENSIONS

X Width	1380 mm	X Gross width	1440 mm
Y Depth	415 mm	Y Gross depth	480 mm
Z Height	270 mm	Z Gross height	480 mm
Net Weight	37,0 kg	Gross Weight	47,0 kg
Net volume	0,154 m3	Gross volume	0,332 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Amperage (A)	0,7A
Electric frequency	50Hz
Electric power	0,105 kW
Voltage	230V - 1N

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a
----------	--------

COLD TECHNICAL SPECIFICATIONS


Annual elec. consumption	586,92 kWh
Clasif. Energy efficiency	B
Climate class	4
Cooling gas load	70,000 g
Energy Efficiency Index	12,38 %
Power consumption 24h	1,61 kWh
Refrigeration power	0,169 kW

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T - 2 A
--------------------------	---------------

OTHERS

Colour	Black
Condensation system	Vent.

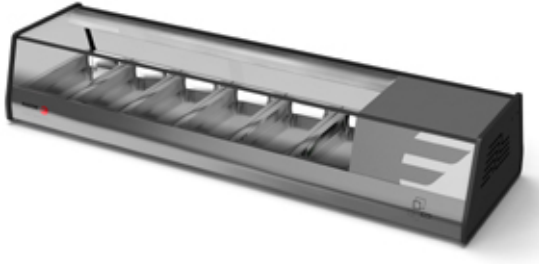

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ST-139P 230V 1N 50Hz

19089745

25/03/2022

