

Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
 FCRV7-4 230V 1N 50/60Hz

19091734

20/05/2022

DENOMINATION:

Ventilated refrigerated well width 720 mm 4 GN 1/1 capacity FCRV7-4 230V 1N 50/60 Hz climate class 4 cold group included refrigerant gas R290

DESCRIPTION :


- Ventilated refrigerated well specially designed to hold, display and serve chilled food (e.g. fruits, desserts, yogurts, cold appetizers, presented on plates/ramekins, etc.) and beverages (bottles, cans) keeping displayed product at optimum temperatures during service time.
- Manufactured in stainless steel with satin finish.
- Ventilated refrigerated well with height-adjustable base to display pans with different heights, up to a maximum depth of 115 mm. Flat display level and drainage area slightly bent.
- Air-blown cooling system generated by the evaporator fans, creating a gentle air curtain over the upper part of the well. Faster cool-down times, better air distribution and optimum results for food conservation are achieved. Its outstanding cooling performance ensures that the displayed food does not dry.
- Ventilated refrigeration system with high-performance electronic fans and large area evaporators.
- Polyurethane insulation with ecological injection, CFC-free, with high-density (40 kg/m³) allowing energy savings by reducing loss of cold air.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g. furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature on the ventilated well at the desired set point.
- Automatic defrost system that minimizes compressor workload and saves energy.
- Stamped drain on the well, to discharge condensation water. A connection from the drain to the sanitation network is compulsory.
- Evaporation system of defrost water as an option.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Prepared for installation of a light foodshield, easily mounted on the structure by means of threaded plates.
- Prepared for installation of a digital thermometer facing the public.
- Digital thermostat allows turning on, at the same time, refrigerated element and foodshield with light.
- Operating temperature in the ventilated well: from 0 °C to +4 °C.

POSSIBLE ACCESSORIES :

- FOODSHIELD WITH LIGHT
- NEUTRAL FOODSHIELD
- EVAPORATION KIT DEFROST WATER
- OVERFLOW PAN DEFROST WATER
- TOOL TO LIFT DROP-IN
- GERMICIDAL LAMP

DIMENSIONS

X Width	1440 mm	X Gross width	1560 mm
Y Depth	720 mm	Y Gross depth	840 mm
Z Height	677 mm	Z Gross height	877 mm
Net Weight	67,0 kg	Gross Weight	77,0 kg
Net volume	0,702 m3	Gross volume	1,149 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,380 kW
Amperage (A)	2,7A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290
----------	-------

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,470 kW
Climate class	4
Cooling gas load	131,000 g


CONNECTIONS TECHNICAL SPECIFICATIONS

Drain 1 diameter	1/2"
------------------	------

SERVICE TROLLEY ACCESSORIES

Cut-out Length (mm)	1415
Cut-out Width (mm)	690
Capacity (GN)	4 x GN1/1
Well type	Ventilated refrigerated
Depth well (mm)	30 - 70 - 115
Bottle Ø 65 mm cap. in well	200
Ramekin Ø 130 mm cap. in well	50
Plate Ø 150mm capac. in well	37




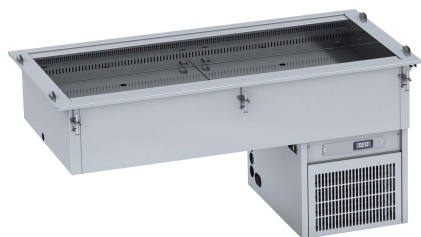


Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FCRV7-4 230V 1N 50/60Hz

19091734

20/05/2022

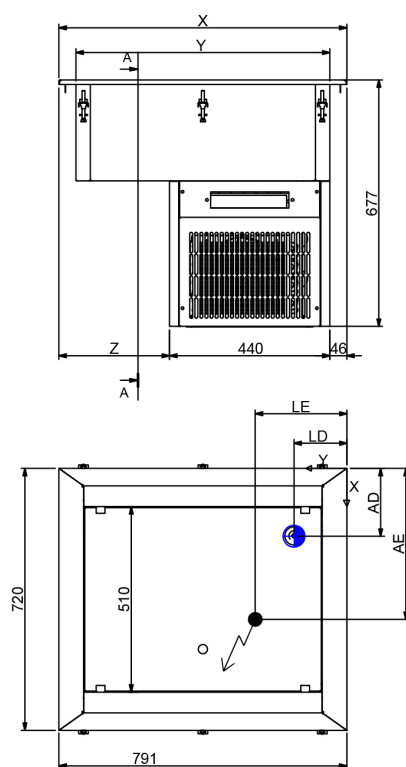

H  : - 346 mm

H  : - 338 mm

W = 720 mm

LE : 253 mm
LD : 130 mm

AE : 428 mm
AD : 127 mm

	X	Y	Z
2GN	790	698	304
3GN	1115	1023	629
4GN	1440	1348	954
5GN	1765	1673	1279
6GN	2090	1998	1604