



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
 FPR6-4 230V 1N 50/60Hz

19092075

20/05/2022

DENOMINATION:

1-level static refrigerated top plate width 610 mm 4 GN 1/1 capacity
 FPR6-4 230V 1N 50/60 Hz climate class 4 cold group included refrigerant
 gas R290

DESCRIPTION :


- Refrigerated top plate specially designed to hold, display and serve chilled food (e.g. fruits, desserts, cold appetizers presented on plates or ramekins) keeping displayed product at optimum temperatures during service time.
- Top plate surface completely flat to achieve the largest and most versatile display area.
- Manufactured in stainless steel with satin finish. Perimeter flange to prevent overflow of defrost water.
- Top plate static refrigeration system by expanded copper coil located in its base.
- Polyurethane insulation with ecological injection, CFC-free, with high-density (40 kg/m³) allowing energy savings by reducing loss of cold air.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g. furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature on the static top plate at the desired set point.
- Automatic defrost system that minimizes compressor workload and saves energy.
- Stamped drain on the plate, to discharge condensation water.
- Automatic evaporation system of defrost water as a standard option.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Prepared for installation of a light foodshield, easily mounted on the structure by means of threaded plates.
- Prepared for an option installation of a digital thermometer facing the public.
- Digital thermostat allows turning on, at the same time, refrigerated element and foodshield with light.
- Operating temperature on the surface of the static top plate: from -10 °C to +5 °C.

POSSIBLE ACCESSORIES :

- FOODSHIELD WITH LIGHT
- NEUTRAL FOODSHIELD
- TOOL TO LIFT DROP-IN

DIMENSIONS

X Width	1440 mm	X Gross width	1560 mm
Y Depth	610 mm	Y Gross depth	730 mm
Z Height	476 mm	Z Gross height	680 mm
Net Weight	58,0 kg	Gross Weight	70,0 kg
Net volume	0,420 m ³	Gross volume	0,774 m ³



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,325 kW
Amperage (A)	1,97A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290
----------	-------

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,295 kW
Climate class	4
Cooling gas load	111,000 g

CONNECTIONS TECHNICAL SPECIFICATIONS

Drain 1 diameter	1/2"
------------------	------

SERVICE TROLLEY ACCESSORIES

Cut-out Length (mm)	1415
Cut-out Width (mm)	585
Capacity (GN)	4 x GN1/1
Plate type	Static refrigerated
Ramekin Ø 130mm cap. on top	47
Plate Ø 150mm capacity on top	35
Plate Ø250 mm capacity on top	12





Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FPR6-4 230V 1N 50/60Hz

19092075

20/05/2022

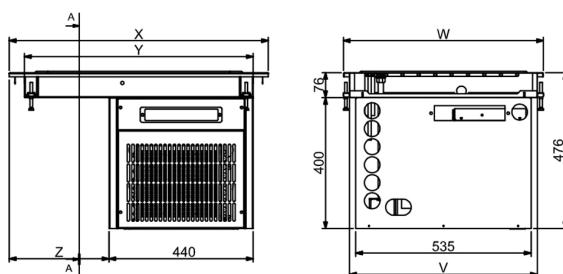

H  : - 228,6 mm

H  : - 288 mm

W = 610 mm	W = 720 mm
LE : 241 mm LD : 143 mm	LE : 241 mm LD : 143 mm
AE : 335 mm AD : 114 mm	AE : 390 mm AD : 168 mm

				W = 610 mm	W = 720 mm
	X	Y	Z	V	V
2GN	790	698	304	573	683
3GN	1115	1023	629	573	683
4GN	1440	1348	954	573	683
5GN	1765	1673	1279	573	683
6GN	2090	1998	1604	573	683