



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
 FP2R6-5 230V 1N 50/60Hz

19092086

20/05/2022

DENOMINATION:

2-level static refrigerated top plate width 610 mm 5 GN 1/1 capacity
 FP2R6-5 230V 1N 50/60 Hz climate class 4 cold group included refrigerant
 gas R290


DESCRIPTION :

- Refrigerated top plate specially designed to hold, display and serve chilled food (e.g. fruits, desserts, cold appetizers presented on plates or ramekins) keeping displayed product at optimum temperatures during service time.
- Top plate surface with two display levels. Upper level, 70 mm higher than lower one, used to enhance the presentation of special dishes.
- Manufactured in stainless steel with satin finish. Perimeter flange to prevent overflow of defrost water.
- Top plate static refrigeration system by expanded copper coil located in its base.
- Polyurethane insulation with ecological injection, CFC-free, with high-density (40 kg/m³) allowing energy savings by reducing loss of cold air.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g. furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature on the static top plate at the desired set point.
- Automatic defrost system that minimizes compressor workload and saves energy.
- Stamped drain on the plate, to discharge condensation water.
- Automatic evaporation system of defrost water as a standard option.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Prepared for installation of a light foodshield, easily mounted on the structure by means of threaded plates.
- Prepared for installation of a digital thermometer facing the public.
- Digital thermostat allows turning on, at the same time, refrigerated element and foodshield with light.
- Operating temperature on the surface of the static top plate: from -10 °C to +5 °C.

POSSIBLE ACCESSORIES :

- NEUTRAL FOODSHIELD
- TOOL TO LIFT DROP-IN

DIMENSIONS



X Width	1765 mm	X Gross width	1885 mm
Y Depth	610 mm	Y Gross depth	730 mm
Z Height	546 mm	Z Gross height	790 mm
Net Weight	69,0 kg	Gross Weight	82,0 kg
Net volume	0,590 m3	Gross volume	1,087 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,405 kW
Amperage (A)	2,7A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290
----------	-------

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,415 kW
Climate class	4
Cooling gas load	140,000 g

CONNECTIONS TECHNICAL SPECIFICATIONS

Drain 1 diameter	1/2"
------------------	------

SERVICE TROLLEY ACCESSORIES

Cut-out Length (mm)	1740
Cut-out Width (mm)	585
Capacity (GN)	5 x GN1/1
Plate type	Static refrigerated
Ramekin Ø 130mm cap. on top	58
Plate Ø 150mm capacity on top	43
Plate Ø250 mm capacity on top	15





Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FP2R6-5 230V 1N 50/60Hz

19092086

20/05/2022

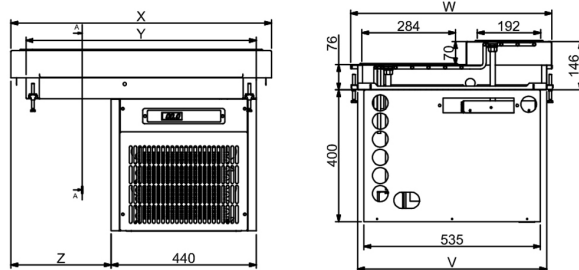

HD1 : - 380 mm HD2 : - 310 mm

H : - 130 mm

W = 610 mm	W = 720 mm
LE : 240 mm	LE : 240 mm
LD1 : 143 mm	LD : 143 mm
LD2 : 143 mm	LD2 : 143 mm
AE : 340 mm	AE : 395 mm
AD1 : 114 mm	AD1 : 141 mm
AD2 : 430 mm	AD2 : 513 mm

	X	Y	Z	W = 610 mm V	W = 720 mm V
2GN	790	698	304	573	683
3GN	1115	1023	629	573	683
4GN	1440	1348	954	573	683
5GN	1765	1673	1279	573	683
6GN	2090	1998	1604	573	683