Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FPRV6-3-W 230V 1N 50/60Hz

19092275 20/05/2022

DENOMINATION:

Mixed glass ceramic plate width 610 mm 3 GN 1/1 capacity plate white color FPRV6-3-W 230V 1N 50/60 Hz climate class 4 cold group included refrigerant gas R290

DESCRIPTION :

- Specially designed to hold, display and distribute chilled or hot food on the same surface. Ideal for establishments with space limitations to reduce the need for specific equipment.
- Manufactured in stainless steel with satin finish.
- Heating system by hidden silicon resistors attached to the bottom of the plate. Silicon resistors allow achieving the working temperature very fast and uniformly across the surface.
- Static refrigeration system by expanded copper coil located in its base.
- Wool rock insulation allowing energy savings by reducing heat loss.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g., furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature on the static top plate at the desired set point.
- Minimum programmed time delay for switching from cold to heat or vice versa, for a correct use of the equipment.
- Operating temperature on the surface plate:
  * In hot mode: from +30 ºC to +120 ºC.
  * In cold mode: from -10 ºC to +50 ºC.
- 4 mm thickness, high-resistant, glass ceramic envelope completely flat.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.

POSSIBLE ACCESSORIES :

- FOODSHIELD WITH CERAMIC HEAT
- FOODSHIELD WITH HALOGEN HEAT
- FOODSHIELD WITH LIGHT
- NEUTRAL FOODSHIELD
- TOOL TO LIFT DROP-IN

DIMENSIONS



X Width	1115 mm	X Gross width	1230 mm
Y Depth	610 mm	Y Gross depth	735 mm
Z Height	478 mm	Z Gross height	650 mm
Net Weight	55,0 kg	Gross Weight	66,0 kg
Net volume	0,670 m3	Gross volume	0,588 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	1,490 kW
Amperage (A)	6,5A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,395 kW
Climate class	4
Cooling gas load	67,000 g

SERVICE TROLLEY ACCESSORIES

Cut-out Lenght (mm)	1090
Cut-out Width (mm)	585
Capacity (GN)	3 x GN1/1
Glass ceramic color	White
Ramekin Ø 130mm cap. on top	38
Plate Ø 150mm capacity on top	29
Plate Ø250 mm capacity on top	10

Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FPRV6-3-W 230V 1N 50/60Hz

19092275 20/05/2022

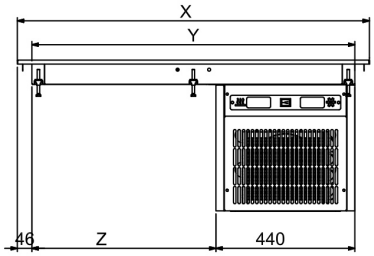

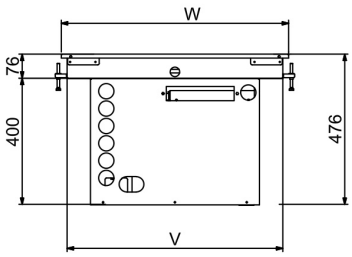

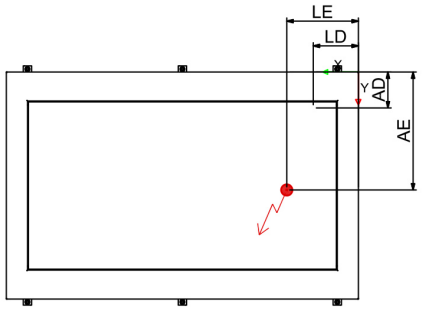

W = 610 mm	W = 720 mm
LE : 241 mm LD : 143 mm AE : 335 mm AD : 114 mm	LE : 241 mm LD : 143 mm AE : 390 mm AD : 168 mm

H : - 228,6 mm

H : - 288 mm

				W = 610 mm	W = 720 mm
	X	Y	Z	V	V
2GN	790	698	304	573	683
3GN	1115	1023	629	573	683