

PREMIUM-300 FAGOR

PREMIUM-300 FAGOR



MEASURES	PACKED	NO PACKED	CHARACTERISTICS
Heigh:	1955 mm.	1840 mm	Minimum order: 20 pcs.
Length:	650 mm.	620 mm	Units per pallet: 1 pc.
Depth:	675 mm.	649 mm	Unitary weight: 91 Kg.
			Packed weight: 101 Kg. (1 pc.)
			Voltage: 230 V
			Frequency: 50 Hz
INTERIOR CAPACITY: 400L			Energy Consumption: 3,09 Kw/24h


SERIGRAPHY MEASURES	
COSTADO	1827x590mm
PUERTA:	1634x531mm

PACKING: Pallet, top cardboard box, surrounding plastic with protections.

1 0 0 0

efficold 

2014-09-26/06/14

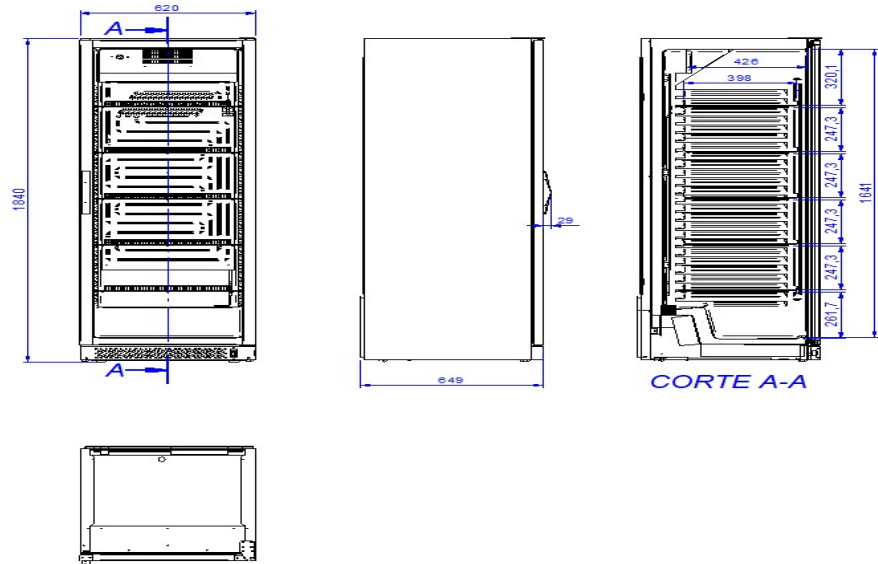

COMMON CONSTRUCTIVE DATA

		Exterior: Sides and front frame made of steel painted in black RAL9005, rest of exterior in galvanized steel.
Height:	1840 mm	Interior: Thermoforming sanitary plastic, colour white.
Length:	620 mm	Shelves: Five units in color white.
Depth:	649 mm	Insulation: Injected polyurethane 40 kg/m ³ (CFC free)
		Door: Double glass (4/18/4). Frame in aluminium anodized in black colour with stainless steel vertical frame and handle.
		Temperature control: Mechanical thermostat

REFRIGERATION SYSTEM

Working temperature: 0 + 6,6 °C with 32 °C environment temperature.
Compressor: Hermetic compressor.
Evaporator: roll-bond evaporator.
Condenser: Wire on tube with low maintenance.
Refrigerating: R600a

SPECIFICATIONS

Plate of numeration: No.
Tag: No.
Packing: Pallet and cardboard protection.
Delivery data: packing in 1 pz.
Sticker: Attention and danger.