

|         |                 |                  |        |                                                    |
|---------|-----------------|------------------|--------|----------------------------------------------------|
| MODELS: | VMD9S<br>VMD12S | VMD15S<br>VMD18S | VMD25S | Madrid series – Curved ventilated without storage. |
|---------|-----------------|------------------|--------|----------------------------------------------------|



VMD25S

### Strengths

- ✓ Combination of different cooling system modules: ventilated, half-static and static. Modules with or without cooled storage. Angles and counters to adapt the line to a space.
- ✓ Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.
- ✓ All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.
- ✓ Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.

| MODEL  | Dimensions (mm) |       |        | Sides thickness (mm) | Nº Doors | Exposure surface (m <sup>2</sup> ) | Cabinet volume (L) | Gross volume (L) | Temp. regime (°C) | Ref. | Net weight (Kg.) |
|--------|-----------------|-------|--------|----------------------|----------|------------------------------------|--------------------|------------------|-------------------|------|------------------|
|        | Length          | Depth | Height |                      |          |                                    |                    |                  |                   |      |                  |
| VMD9S  | 938             | 1150  | 1290   | 30 + 30              | 1        | 0,52                               | 131                | 1392             | 0°C/+6°C          | R452 | 116              |
| VMD12S | 1250            | 1150  | 1290   | 30 + 30              | 2        | 0,69                               | 175                | 1854             | 0°C/+6°C          | R452 | 154              |
| VMD15S | 1562            | 1150  | 1290   | 30 + 30              | 2        | 0,87                               | 219                | 2317             | 0°C/+6°C          | R452 | 186              |
| VMD18S | 1875            | 1150  | 1290   | 30 + 30              | 3        | 1,04                               | 263                | 2781             | 0°C/+6°C          | R452 | 206              |
| VMD25S | 2500            | 1150  | 1290   | 30 + 30              | 4        | 1,39                               | 350                | 3709             | 0°C/+6°C          | R452 | 275              |

|         |                 |                  |        |                                                           |
|---------|-----------------|------------------|--------|-----------------------------------------------------------|
| MODELS: | VMD9S<br>VMD12S | VMD15S<br>VMD18S | VMD25S | <i>Madrid series – Curved ventilated without storage.</i> |
|---------|-----------------|------------------|--------|-----------------------------------------------------------|

## STANDARD FEATURES

➤ **Modular line**

- Different cooling system modules can be combined using complete dividers.
- Designed for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

► **Exterior**

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- AISI 304 stainless steel exposure surface.
- Lacquered DM decoration.
- Folding secured curved glass.

► Interior

- Plastic coated steel interior.
- Enamelled steel base.
- LED lighted middle shelf and exposure surface.
- Storage door clearance of 425x255 mm.

► **Insulation**

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m<sup>3</sup>.
- Zero ODP and Low GWP.

➤ **Refrigeration**

- Temperature and defrost regulated by a digital controller.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

➤ **Electrical**

- Electrical connection: 230 V / 1 ph / 50 Hz.



### OPTIONAL

- ☐ Sliding back doors.
- ☐ Night curtains.
- ☐ Double plane (without storage).
- ☐ Lacquered frontal + sides.
- ☐ Range of decoration colours (consult).
- ☐ Electrical connection 230 V / 1 ph / 60 Hz.
- ☐ Electrical connection 115 V / 1 ph / 60 Hz.

| MODEL  | Dimensions palletizing (mm) |       |        | Pallet weight (Kg.) | Power (W) | Comp. (HP) | Cooling power (W at -10°C) | Consumption (kWh/24h) | Inten. (A) |
|--------|-----------------------------|-------|--------|---------------------|-----------|------------|----------------------------|-----------------------|------------|
|        | Length                      | Depth | Height |                     |           |            |                            |                       |            |
| VMD9S  | 1100                        | 1210  | 1500   | 190                 | 730       | 1/2        | 817                        | 10,2                  | 3,1        |
| VMD12S | 1340                        | 1210  | 1500   | 200                 | 980       | 5/8        | 1096                       | 13,7                  | 3,5        |
| VMD15S | 1700                        | 1210  | 1515   | 240                 | 1030      | 3/4        | 1315                       | 14,4                  | 5,1        |
| VMD18S | 2030                        | 1200  | 1500   | 275                 | 1260      | 1          | 1506                       | 17,6                  | 4,1        |
| VMD25S | 2660                        | 1210  | 1550   | 416                 | 1520      | 1 + 1/6    | 2009                       | 21,3                  | 5,7        |

MODELS: **VMD9S**  
**VMD12S**


VMD15S  
VMD18S

**VMD25S**


***Madrid series – Curved ventilated without storage.***

## GENERAL VIEW

### FRONT VIEW

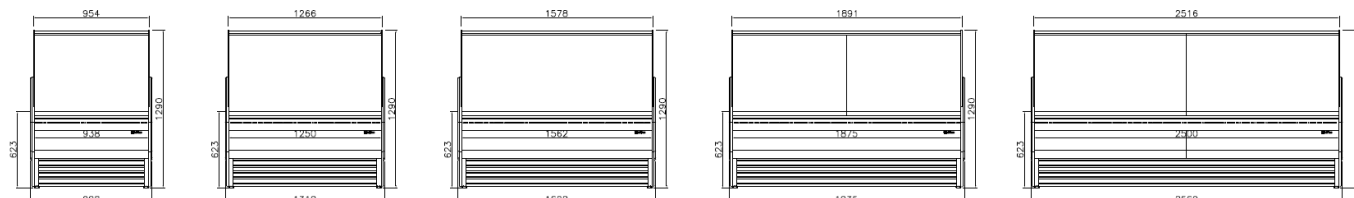

### TOP VIEW

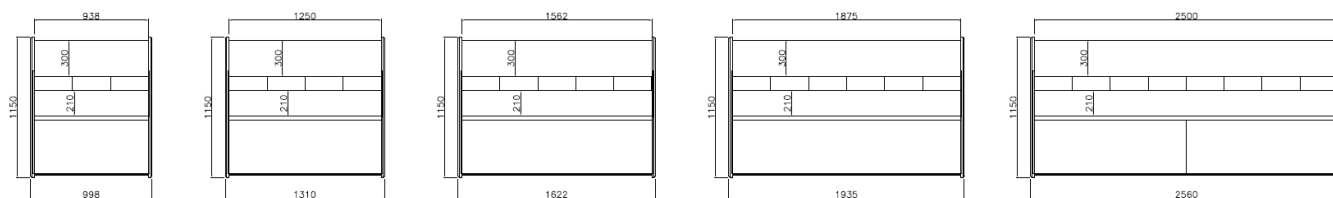

VMD9S


VMD12S

VMD15S


VMD18S

VMD25S

### SIDE VIEW



## CONNECTIONS

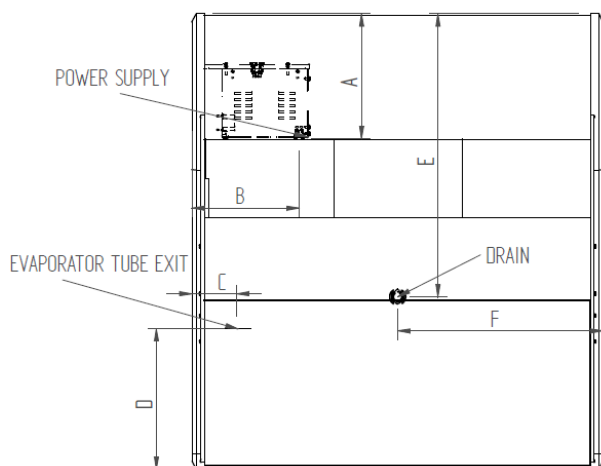

| MODELOS | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | F<br>(mm) |
|---------|-----------|-----------|-----------|-----------|-----------|-----------|
| VMD9S   | 303       | 260       | 108       | 341       | 687       | 500       |
| VMD12S  | 303       | 260       | 108       | 341       | 687       | 625       |
| VMD15S  | 303       | 260       | 108       | 341       | 687       | 781       |
| VMD18S  | 303       | 260       | 108       | 341       | 687       | 938       |
| VMD25S  | 303       | 260       | 108       | 341       | 687       | 1250      |