



Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
PBCC-4 230V 1N 50/60hz

19078509

30/03/2021

DENOMINATION:


Undercounter hot plate 4 GN 1/1 capacity PBCC-4 230V 1N 50/60 Hz

DESCRIPTION :

- "- Hot plate specially designed to be mounted under a countertop, keeping pre-heated products at optimum temperatures during service time.
- Factory-approved countertop materials include granite and quartz (Silestone®) up to 20 mm. Please contact factory for applications with other materials.
- Top plate aluminum surface for a better diffusion of the hot on the worktop thanks to its high thermal conductivity.
- Total seamless countertop, maximizing hygiene, tightness and aesthetics.
- Expansion joint installation needed between countertop hot and neutral areas.
- Heating system by hidden silicon resistors attached to the top of the plate. Silicon resistors allow achieving the working temperature very fast and uniformly across the surface.
- Control pannel with 1-meter long cable.
- Electronic thermostat, with digital display, to control and regulate the temperature on the worktop at the desired set point.
- Operating temperature under worktop: from +80 °C to +100 °C."

DIMENSIONS

X Width	1261 mm	X Gross width	1455 mm
Y Depth	590 mm	Y Gross depth	820 mm
Z Height	147 mm	Z Gross height	430 mm
Net Weight	22,0 kg	Gross Weight	27,0 kg
Net volume	0,124 m3	Gross volume	0,513 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	1,805 kW
Amperage (A)	7,93A
Voltage	230V - 1N
Electric frequency	50/60Hz

TECHNICAL FEATURES

Capacity (GN)	4 x GN1/1
Ramekin Ø 130mm cap. on top	51
Plate Ø 150mm capacity on top	38
Plate Ø250 mm capacity on top	14






Catalogue
FOOD SERVICE

Capítulo
DISTRIBUTION

Modelo
PBCC-4 230V 1N 50/60hz

19078509

30/03/2021

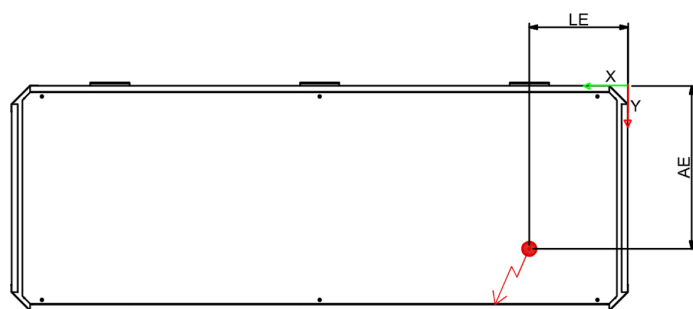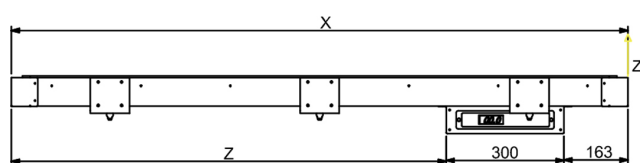

LE : 287 mm

AE : 296 mm

H : - 112 mm

	X	Z
2GN	611	133
3GN	936	458
4GN	1261	783
5GN	1586	1108
6GN	1911	1433