The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CBCP-3S LC GD 230V 1N 50Hz

19089700 09/06/2022

DENOMINATION:

Refrigerated front counter with glass doors and locks with 3 doors.

DESCRIPTION :

- Interior and exterior in high quality austenitic stainless steel.
- Rear guard of 10 cm / Right side cooling unit with pivoting grille door.
- Internal shelves of plastic-coated steel, adjustable in height.
- Neutral drawer over refrigeration unit.
- R-600a ecological coolant, CFC free.
- Copper pipe evaporator with aluminium wings. Forced draught.
- Automatic evaporation of defrosting water.
- Climatic class: 4.
- Electronic temperature and defrosting control, and display.
- HEIGHT: Counter units are 1045 mm tall. This height makes them ideal to combine with our coffee counters and shelves.
- Refrigerated FRONT counters with glass doors

POSSIBLE OPTIONS :

- Stainless Backing
- Wheels Kit (Factory Assembly)
- British plug
- Door frame resistance
- Left group
- Without breastplate
- Without Countertop
- Panoramic aperture

STANDARD OPTIONS :

- Glass door
- Locks

POSSIBLE ACCESSORIES :

- REFRIGERATION
- ACCESSORIES FOR REFRIGERATION

SUPPLIED ACCESSORIES:

- 12034847 Central grid Epoxi (405x525) 1
- 12034975 Side grill in Epoxi(405x460) 2
- 12037728 Support for Snack grid 12

DIMENSIONS



X Width	2017 mm	X Gross width	2150 mm
Y Depth	600 mm	Y Gross depth	680 mm
Z Height	1045 mm	Z Gross height	1195 mm
Net Weight	155,0 kg	Gross Weight	164,0 kg
Net volume	1,265 m3	Gross volume	1,747 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,209 kW
Amperage (A)	0,96 A
Voltage	230V - 1N
Electric frequency	50Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-600a

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,361 kW
Annual elec. consumption	1630,20 kWh
Power consumption 24h	4,47 kWh
Gross internal volume	551 L
Climate class	4
Cooling gas load	64,000 g
Clasif. Energy efficiency	C
Energy Efficiency Index	23,75 %

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

OTHERS

Number of doors	3
Condensation system	Vent.

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CBCP-3S LC GD 230V 1N 50Hz
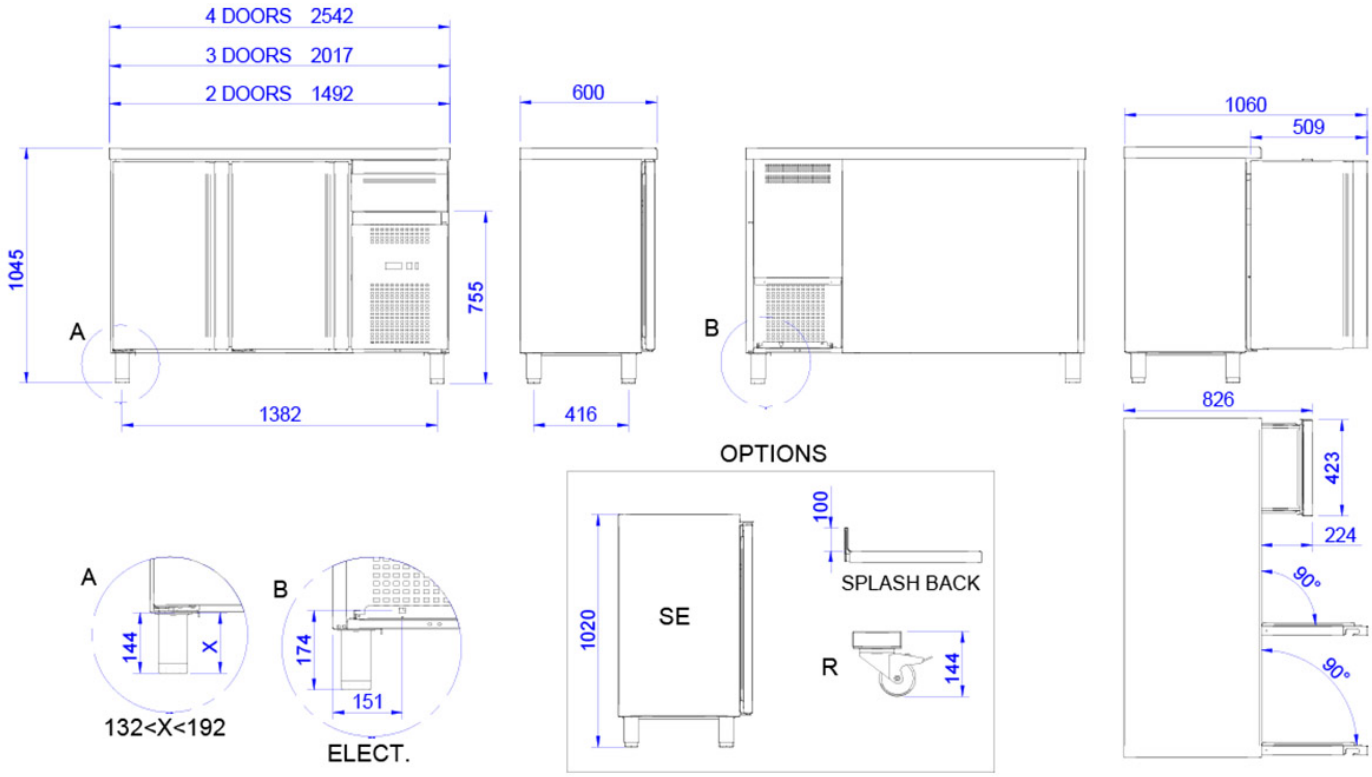
19089700 09/06/2022